Flat Bulk Cordage 6-Conductor Stranded 1000 Ft.

PRODUCT SPECIFICATION

Package includes:

A. 6-Conductor Stranded Bulk Cordage, 1 Reel

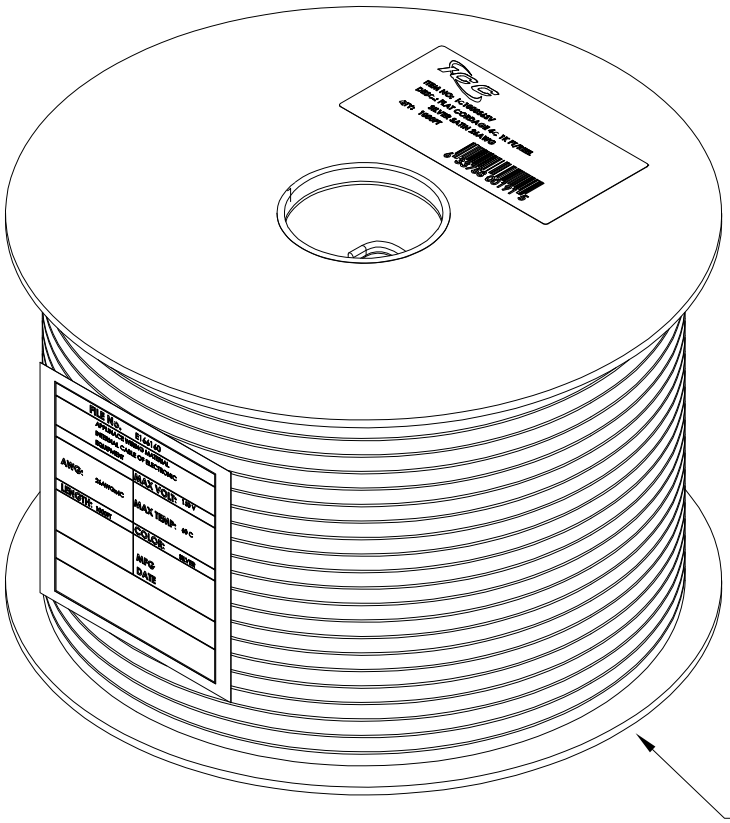

Features and Benefits:

- Designed for voice and low speed data networks.
- 6-conductor (3-pair) flat silver line cord.
- 26 AWG stranded copper wire.
- 1000 ft per reel.
- Available in silver.

BULK CORDAGE, FLAT, 6 CONDUCTOR, 1000 FT			
ITEM NO.	IC1000S6SV	REV.	A
DWG NO.	PS1000S6SV	PAGE NO.	1

ICC Premium Products Proven Performance Competitive Prices

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com

© 2008 ICC. THIS DOCUMENT AND THE DESIGNS, SPECIFICATIONS AND INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF ICC. REPRODUCTION, MODIFICATION, ALTERATION, OR UNAUTHORIZED USE WITHOUT ICC'S APPROVAL IS STRICTLY PROHIBITED. ICC AND THE ICC LOGO ARE THE TRADENAME AND REGISTERED TRADEMARK OF ICC. ALL RIGHTS RESERVED.

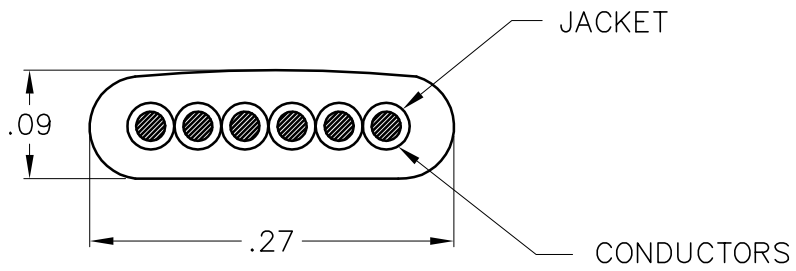

NOTE: UNLESS OTHERWISE SPECIFIED

1. RATING AND TEMPERATURE RANGE:
   RATING: 60°C 150 VOLTS PEAK
   CONTINUOUS OPERATING TEMPERATURE RANGE: -10°C TO 60°C
   STORAGE TEMPERATURE RANGE: -10°C TO 60°C

2. CABLE CONSTRUCTION:
   CONDUCTOR:
   MATERIAL: STRANDED, BARE COPPER WIRE
   CONSTRUCTION: 26AWG, 7X34AWG

   INSULATION:
   MATERIAL: POLYPROPYLENE (PP)
   AVERAGE THICKNESS: .0071" MIN
   MINIMUM THICKNESS: .00512" MIN
   OVERALL DIAMETER: .0374" NOM
   COLOR: WHITE, BLACK, RED, GREEN, YELLOW, BLUE

   JACKET:
   MATERIAL: FLAME RETARDANT POLYVINYL CHLORIDE (FR-PVC)
   AVERAGE THICKNESS: .0200" MIN
   MINIMUM THICKNESS: .0162" MIN
   OVERALL DIAMETER: .0945"X.2756"±.00394"
   COLOR: SILVER

3. ELECTRICAL PROPERTIES:
   CONTINUITY: NO DISCONTINUITIES THROUGHOUT CONDUCTOR LENGTH
   CONDUCTOR RESISTANCE: 140 OHMS/KM MAX AT 20°C
   INSULATION RESISTANCE: 100 MEGA OHMS/KM MIN AT 20°C
   DIELECTRICAL STRENGTH: 500V/1 MINUTE IN AIR
   SPARK TEST: 2KV IN AIR

BULK CORDAGE, FLAT, 6 CONDUCTOR, 1000 FT			
ITEM NO.	IC1000S6SV	REV. A	
DWG NO.	PS1000S6SV	PAGE NO. 2	

© 2008 ICC. THIS DOCUMENT AND THE DESIGNS, SPECIFICATIONS AND INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF ICC. REPRODUCTION, MODIFICATION, ALTERATION, OR UNAUTHORIZED USE WITHOUT ICC'S APPROVAL IS STRICTLY PROHIBITED. ICC AND THE ICC LOGO ARE THE TRADENAME AND REGISTERED TRADEMARK OF ICC. ALL RIGHTS RESERVED.